

# HC2A



HC2A-S  
HC2A-SH



HC2A-S3  
HC2A-S3H



HC2A-SM

## ADVANTAGES

- Measures relative humidity and temperature
- Outstanding accuracy, repeatability and long-term stability
- Advanced probe housing and construction
- Available with interchangeable sensor
- Hot swappable

## APPLICATIONS

- Pharmaceutical industry
- Meteorology
- Food industry
- Building services equipment
- Paper and textile



### Sensor HYGROMER HT-1

- High accuracy and repeatability (Up to  $\pm 0.5\%$  RH)
- Excellent Long-term stability ( $< 1\%$  RH per year)

### Smart Electronic

- Based on the Rotronic's AirChip3000
- Calculates the dew / frost point
- Alarm generation
- Saves adjustment data so that probes can be interchanged without re-adjusting
- Hot-swappable

### Flexibility and Compatibility

- User scalable analog output signals ( $2 \times 0 \dots 1V$ )<sup>1</sup>
- Digital interface via UART<sup>2</sup>
- Rapidly interfaced with HygroClip2 devices from Rotronic or in OEM<sup>3</sup> applications



<sup>1</sup> HW4 software and service cable AC3001 are required

<sup>2</sup> Universal Asynchronous Receiver Transmitter

<sup>3</sup> Original Equipment manufacturer

## High Precision

High Precision probes are factory-adjusted at 23°C and 10, 20, 30, 40, 50, 60, 70, 80, 90 %RH, then calibrated at 20, 50, 80 %RH.

Order Code	Type	Accuracy @ 23 °C	Application Range	Sensor Element	Long-term stability
HC2A-SH	High Precision	±0.5 %RH ±0.1 K	-50..100 °C 0...100 %RH	HYGROMER HT-1	<1 %RH / year
HC2A-S3H	Meteo <sup>4</sup> High Precision				

## Standard Precision

Standards Precision probes are factory-adjusted at 23°C and 10, 35, 80 %RH.

Order Code	Type	Accuracy @ 23 °C	Application Range	Sensor Element	Long-term stability
HC2A-S	Standard	±0.8 %RH ±0.1 K	-50..100 °C 0...100 %RH	HYGROMER HT-1	<1 %RH / year
HC2A-S3	Meteo4 Standard				
HC2A-SM	Steel Probe				
HC2A-S-HH	Standard Probe for Rough environment <sup>5</sup>	±1.2 %RH ±0.1 K	Hygromer HH-1		
HC2A-SM-HH	Standard Probe for Rough environment <sup>5</sup>				

## Computer Connection

The cable AC3001 allows direct connection to a computer via USB and, with use of the HW4 software to adjust the HC2A probe's parameters such as

- Scale of Analog outputs
- Calculated parameter on analog outputs

## Possible Filters

Order Code	Filter carrier	Filter Element	Pore size	Application Range
SPA-PCB-PE	Polycarbonate, black	Polyethylene, white	40-50 µm	-50...100°C
SPA-PCB-PTFE		PTFE, white	10 µm	
SPA-PCB-WM		Wire mesh 1.4401		
SPA-PCW-PE	Polycarbonate, white	Polyethylene, white	40-50 µm	
SPA-PCW-PTFE		PTFE, white	10 µm	
SPA-PCW-WM		Wire mesh 1.4401		
SPA-PE	No filter carrier, only filter	Polyethylene	40-50 µm	-100...200 °C
SPA-PTFE		PTFE, white	10 µm	
SPA-WM		Wire mesh 1.4401		
SPA-SS-WM	1,4301			
SPA-SSS	Sintered steel, 1.4404 (Carrier and filter)		25 µm	
SPA-SS-PFTE	Stainless steel, 1.4301	Teflon	10 µm	
SPA-SS		No filter	-	

**Standard:** HC2A-S + SPA-PCB-PE with filter (Polyethylene, white)


<sup>4</sup> The housing is full white to avoid any heating from sun radiation.

<sup>5</sup> Especially suitable for environments with hydrogen peroxide (H<sub>2</sub>O<sub>2</sub>). Please refer the HYGROMER HH-1 datasheet for more information.


## Possible Extension Cables

It is possible to extend the distance between the probe and its reading device with extension cable.

- Passive connection are possible up to 5m (see table below for possible options)
- An amplifier cable (AC3003) allows connections up to 100m

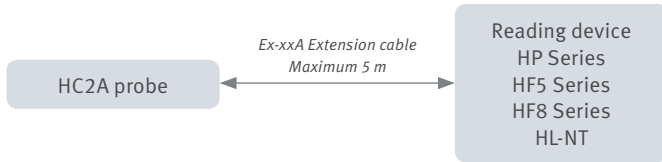


Order Code	Cable Length	Color
E2-01A	1 m	Black
E2-02A	2 m	
E2-05A	5 m	
E3-01A	1 m	White
E3-02A	2 m	
E3-05A	5 m	

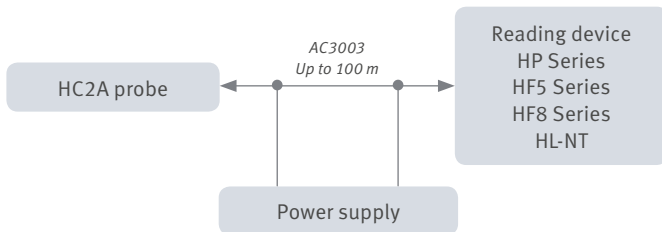


Order Code	Description	Cable Length
AC3003	Signal amplifier, probe and instrument side with luster terminal	Self assembly
AC3003/10	AC3003 with luster terminal and pre-assembled Cat. 5 cable	10 m
AC3003/20		20 m
AC3003/50		50 m
AC3003/80		80 m
AC3003/100		100 m

## TECHNICAL INFORMATION


HC2A-S, HC2A-S3, HC2A-SH, HC2A-S3H, HC2A-S-HH

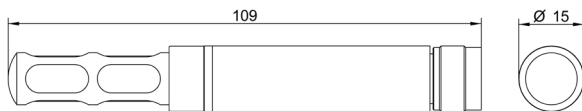

HC2A-SM, HC2A-SM-HH

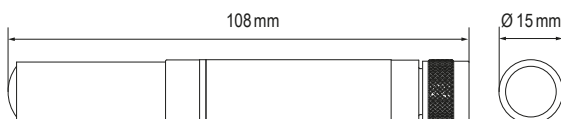

Connector pin-out




- 1 ● V+
- 2 ● GND (digital and supply)
- 3 ● RXD (UART)
- 4 ● TXD (UART)
- 5 ○ Analog signal humidity (0...100 %RH = 0...1 V)
- 6 ● Analogsignal °C (-40...60 °C = 0...1 V)
- 7 ● AGND (analog ground)

Technical Data

Supply voltage	3,3...5 VDC
Current consumption	Approx. 5 mA (Adjusted at 3.3 VDC)
Load	> 10 kΩ
Protection rating	IP65 (except the sensor area)
Digital Interface	UART (19200 baud fixed)
Protocols	<ul style="list-style-type: none"> <li>• RoASCII (Default)</li> <li>• MODBUS (setting with HW4)</li> </ul>
Analog outputs	2x 0...1 V
Analog outputs Parameters	<ul style="list-style-type: none"> <li>• Humidity (default)</li> <li>• Temperature (default)</li> <li>• Dew point (setting with HW4)</li> <li>• Frost point (setting with HW4)</li> </ul>
Analog output scaling	<ul style="list-style-type: none"> <li>• Humidity (0...100%RH = 0...1V)</li> <li>• Temperature (-40...60 = 0...1V)</li> <li>• Freely settable with HW4</li> </ul>
Timing	1 <sup>st</sup> measurement after 1.5 s Measurement interval of 1 s

### Humidity Window

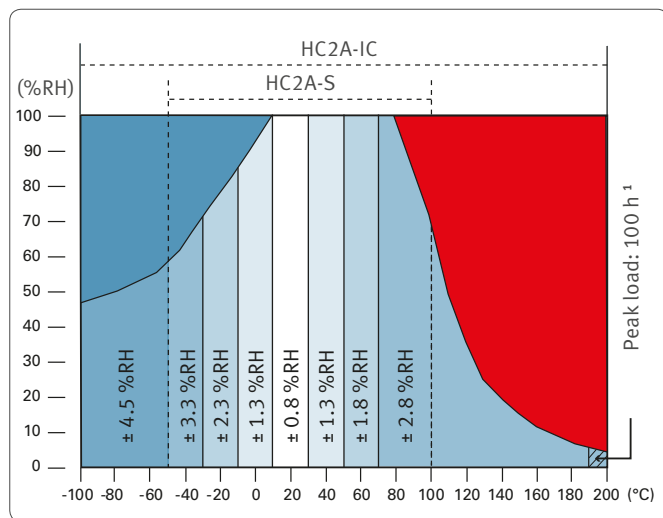

### Temperature Window

